

CUSTOM SHOWER 5

PAGE 1 OF 5

For Custom Shower 5, Advocate used the KBRs Point Drain System 32 x 48 inch center drain model for an existing shower alcove remodeling job, with a 36 inch KBRs bench that we saw cut to fit (as per KBRs product instructions.) We used 12x12 inch wall tiles, bullnosed edge tiles and Laticrete tile mortar and grout products with a customer chosen tile for the walls, the niche, dam front and accents.

This job had some unique challenges for us based on the very narrow width of the room, all of which had to be tweaked at the bottom to shimmy in the base. This included removing two courses of floor tile back toward the toilet to get the Shower Base® in around the baseboard heat element. We had to back grind old thin set off to re-use the tile; ugh – the tile was 6 ½ inch size, and no longer made so we had to be diligent and super careful here. Excellent outcome and thankful to the Almighty for it.

Advocate Insurance Restoration & Remodeling proudly uses KBRs products.

KBRs LOGO USED WITH PERMISSION OF KBRs®






KBRS – Building the beast from the ground up. Best product of its kind. Period.



Custom granite – Advocate had to carefully cut the shower dam and install it around the KBRS bench seat prior to setting the granite dam slab. Mitered the corners

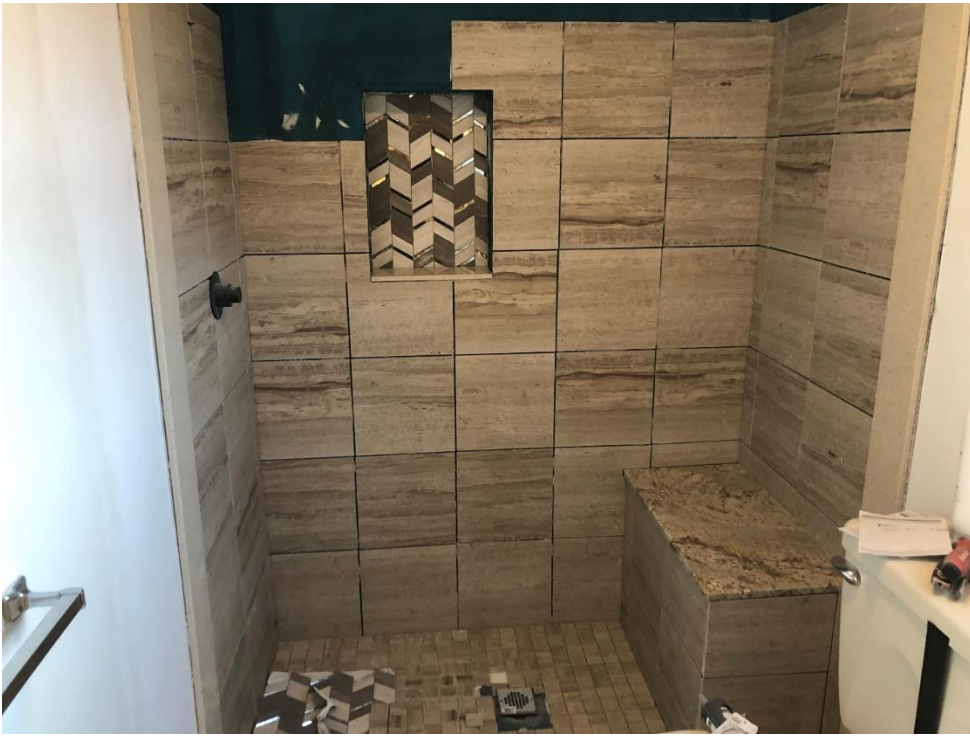

Getting there.....



Setting the niche, keeping it level but sloping the pitch of the bottom shelf away from the outside wall of the house using my driver's license as a shim – listen, I had a deadline here.....and no, that is not duct tape.....so no jokes, please.



Yep, that's all she wrote -no wait - she did write me a referral on the website.....